


Configuration 2:

ATP registration numbers of vehicle

ATP type approval no. of refr. unit	3420K REV1
ATP type approval no. of body	GL 20 1992
Vehicle ATP certificate no.	1887
Vehicle identification no.	5287657

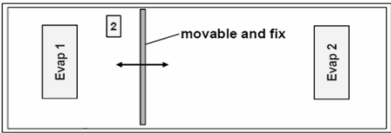

Data of overall body	Internal dimensions			Floor material	K value of outer body
	L	W	H		
	13,40 m	2,46 m	2,70 m	Alu	0,37 W/(m ² ·°C)

A. Input data

A1. Data of insulated body

Data of internal bulkheads		Movable or fixed	Thickness	K value [W/m2.°C]
Transversal bulkhead (1→2)				
		movable	50 mm	3,2

Dimensions / Use of Compartments	Internal length			Fixed temperature in each comp.?	Compartment temperature	Dry freight use?	Lowest class temp. permitted in each comp.?	Lowest permitted temp. per comp.
	Minimal length	Maximal length						
Compartment 1	5,65 m	12,55 m		No		Yes	Yes	
Compartment 2	0,80 m	9,75 m				Yes		

A2. Data of multitemp refrigeration unit

Cooling capacities at:	-20 °C
Nominal refr. cap. host unit	8557
Individual refr. cap. evap. 1	8221
Individual refr. cap. evap. 2	4510

Additional constraints on combinations of temperatures when "Fixed temperature in each comp."=No:

1. Two compartments are never used at the same temperature.

B. Result of calculation (incl. dimensioning factor 1,75)

B1. Sufficient refrigerating capacity?

Nominal refrigerating capacity:	Ok
Minimally required nominal refr. cap.	5 944 W
Effective refrigerating capacity	Ok

Minimal bulkhead thicknesses do not meet ATP requirements

B2. Maximum refrigerating demand in each compartment

Individual refrigerating demand in each compartment	Maximum refrigerating demand in compartment 1						Maximum refrigerating demand in compartment 2					
	Refr./heat. demand	Tempe- ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width	Refr./heat. demand	Tempe- ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width
Compartment 1	5 944 W	-20 °C	72%	8 221 W	12,55 m	2,46 m	-1 063 W	20 °C	0%	0 W	5,65 m	2,46 m
Compartment 2	-1 390 W	20 °C	0%	0 W	0,80 m	2,46 m	4 306 W	-20 °C	95%	4 510 W	7,70 m	2,46 m
Collective:	5 944 W		72%	8 221 W			4 306 W		95%	4 510 W		

B3. Maximum collective refrigerating demand of all compartments

Maximum collective refrigerating demand	Refr./heat. demand	Tempe- ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width
Compartment 1	5 944 W	-20 °C	72%	8 221 W	12,55 m	2,46 m
Compartment 2	-1 390 W	20 °C	0%	0 W	0,80 m	2,46 m
Collective:	5 944 W		72%	8 221 W		

B4. Maximum collective relative running time of all compartments

Maximum collective refrigerating demand	Refr./heat. demand	Tempe- ratures	Required rel. run. times	Available effect. refr. capacity	Internal length	Internal width
Compartment 1	-1 063 W	20 °C	0%	0 W	5,65 m	2,46 m
Compartment 2	4 306 W	-20 °C	95%	4 510 W	7,70 m	2,46 m
Collective:	4 306 W		95%	4 510 W		

Nom de l'autorité compétente:



Adresse:

5 avenue des prés
CS20029
94266 - Fresnes
France

+33 (0) 1 49 84 84 84
contact@cemafruid.fr

Le / on : 2025/12/02

L'autorité compétente / The competent authority
Cemafruid SAS
Responsable ATP / Responsible for the ATP

Le Président de CEMAFROID SAS

TECNEA SAS représentée par son Président Géraud CAVALIER